


# FM-E400-1

## Specifications

Foam Volume Output	38 lpm
Solution Usage	50 lph
Average Drop Interval	2.4 seconds
Ribbon Foam Capable	Good
In-Cab Density Control	Yes
Overall Dimensions	550mm x 450mm x 270mm
Mounting Footprint	4 Bolts on backing plate
Air Source	Remote Supply
Maximum Amperage	12 Amps
Shipping Weight	12 Kg

## Parts List

Part Number	Description	Qty Required
AAB122ML-12P100	½" 100 Mesh Poly Filter	1
A-EL1238	Poly Elbow ½" to 3/8"	1
A-M1200	Poly Nipple ½"	1
A-RB1214	Poly Reducing Bush ½" to ¼"	1
A-SHM34	Poly Hose Mender ¾"	2
BALL12F2	½" Ball Valve Male to Female	1
FC0814	M/Out Flow Control 8mm to ¼"	1
FL2135-568	12 Volt Buna Diaphragm Pump	1
FM-400	Foam Marker Cover	1
FM-403	Regulator Assembly	1
FM-405	Supply Assembly	1
FM-NRV14	¼" Non Return Valve	1
L-E1022	Soneloid Valve	1
L-E4024	Solenoid Valve ¾"	2
L-G1400	63mm Gauge 0-400 Kpa	1
LST075-HB	Poly T Strainer Head	1
QF1818	1/8" Quick Fit Male Connector	2
QFEL1414	¼" Quick Fit Male Elbow	2
QFT1818	1/8" Quick Fit Tee	1
TFEL1414FF	¼" Female Brass Elbow	1
TFEL1438	¼" to 3/8" Brass Elbow	1
TFEL1438MM	¼" to 3/8" Male Brass Elbow	1
TFM1414	¼" Brass Nipple	1
TFRB1418	¼" to 1/8" Brass Reducing Nipple	2
TFRB3418	¾" to 1/8" Brass Reducing Nipple	1
TFRB3438	¾" to 3/8" Brass Reducing Nipple	1

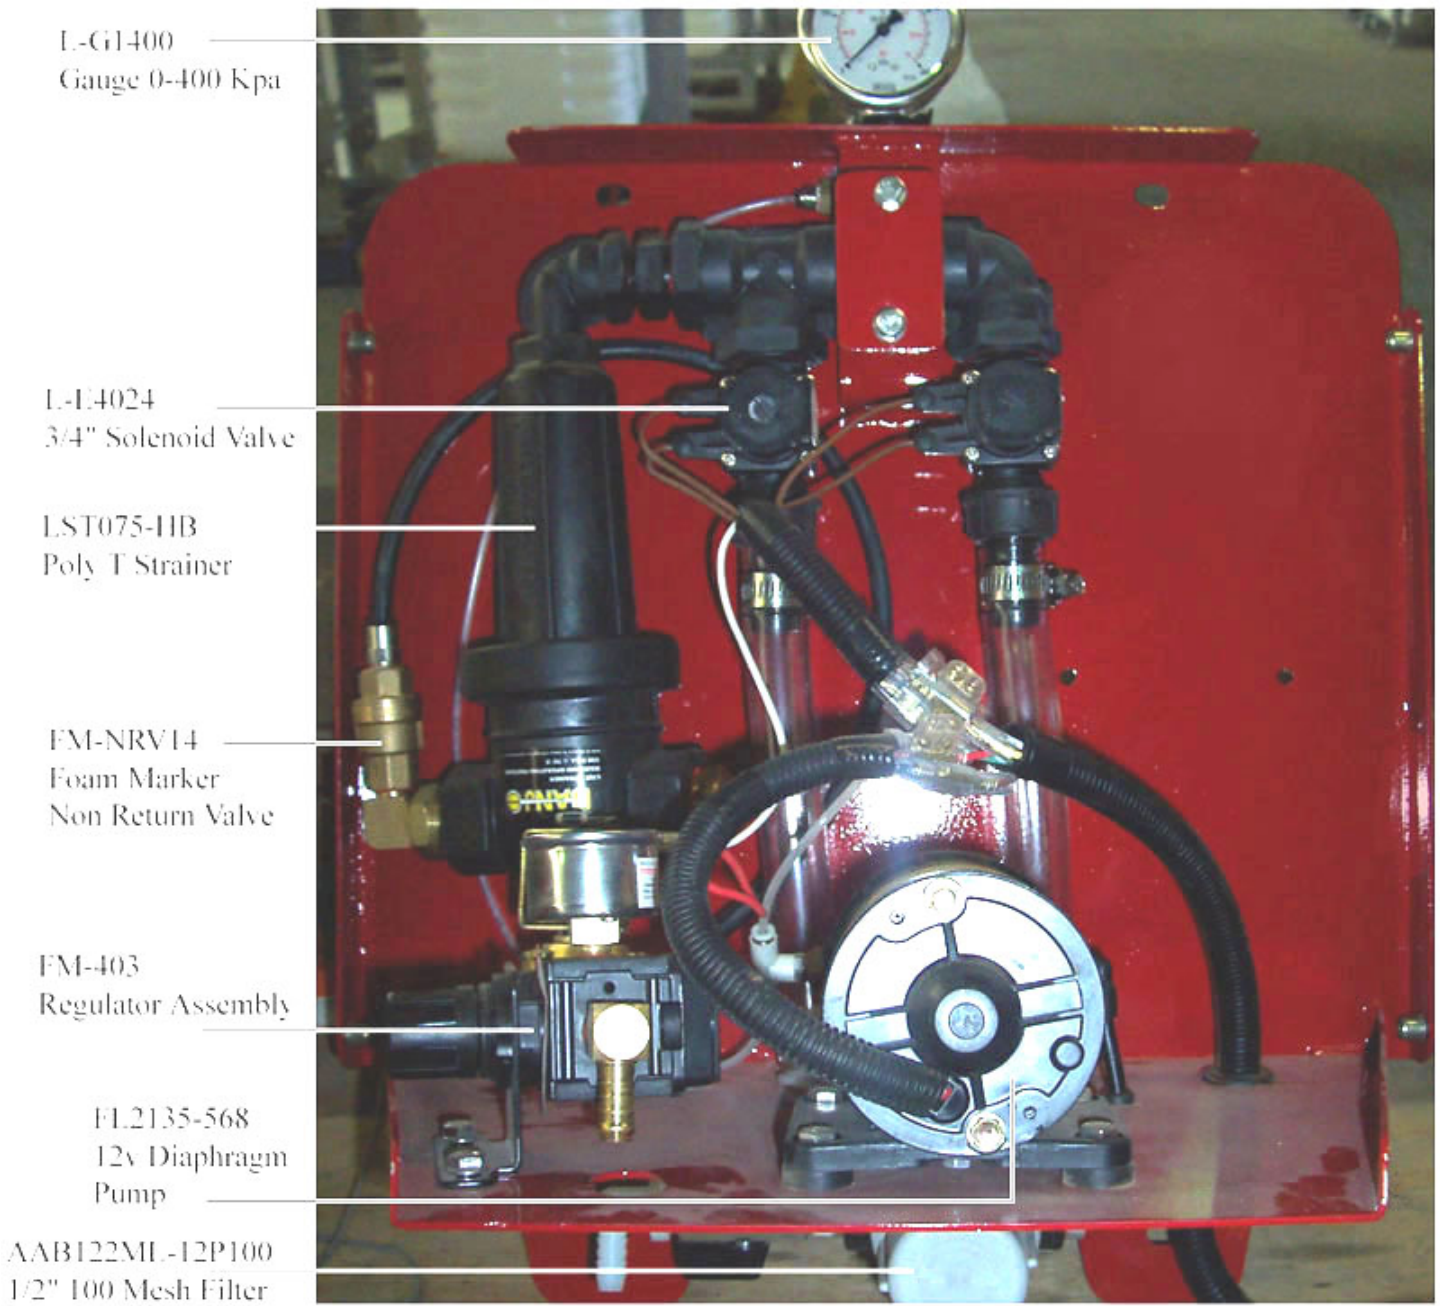

L-G1400  
Gauge 0-400 Kpa

L-14024  
3/4" Solenoid Valve

LST075-11B  
Poly T Strainer

FM-NRV14  
Foam Marker  
Non Return Valve

FM-403  
Regulator Assembly

FL2135-568  
12v Diaphragm  
Pump

AAB122MI-12P100  
1/2" 100 Mesh Filter